

Data Sheet

General and Commercial Data

Product Type	Exteriors - Road Lighting
Model	CITYLED M
Code	CSTM4K3P112
Description	CITYLED M 192LED 1000MA I2 150W 4K 90-305V
Available Colors	Grey
Application	Walkways, Condos, Courtyards, Poles, Urban
Net Weight [kg]	5,5
Dimensions [mm]	580x300x120
Pieces per Pack	1

Technical Characteristics

Volume [m3]	0,021
Insulation Class	I
IP Code	66
Impact Resistance IK Rating	8
Material	Die-cast aluminium
Voltage [V]	220
Frequency [Hz]	60
Power Factor (cos(fi))	0,92
Luminaire Power [W]	150
Luminaire Flux [lm]	18400
Luminous Efficacy [lm/W]	123
Range Ambient Temperature [°C]	-40 ÷ 50
Ballast	For constant current LED
Source	LED - CCT 5000 K - CRI 80
Average Life [h]	60000

Photometric Parameters


Measurement	422-6-1
CIE Code	[70,94,99,100,100]
Optics Type	Road
Optics	Road

Norms

EN 60598
 EN 60598 - 1
 CEI EN 60598-2-3
 CEI EN 60598-2-5



Photometric Settings

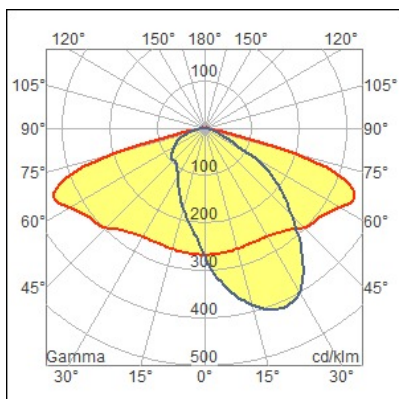

422-6-1